




**uPVC Conduit pipes with integral Solvent Weld Sockets**



**Material:** uPVC  
**Colour:** White  
**Dimension:** mm  
**Trademark:** PPP

Rigid Electrical Conduit

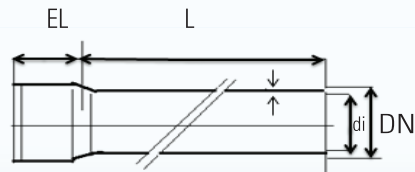

Pipe length : 3 or 6m including socket

**Field of application:**

- Rigid conduit systems for cable management
- Classification coding: Medium duty: 3321 / Heavy duty: 4321

**GENERAL TECHNICAL CHARACTERISTICS**

**General Characteristics**

- Dimensions
- Nominal outside diameters
- Wall Thickness (plain conduit)

**Mechanical Characteristics**

- Resistance to Compression
- Resistance to Impact

**According to temperature**

- Lower temperature
- Upper temperature

**Standard Requirements**

As per Clause 8  
 Clause 8 Table 101 size only (BS EN 61386-21)  
 Annex B B.1 BS EN 61386-1  
 Clause 10.2 - **Duty:** Medium (750N) & Heavy (1250N)  
 Clause 10.3 IEC 61386-1 - **Duty:** Medium & Heavy  
 Clause 6.2.1 Table 1 BS EN 61386-1 -5°C  
 Clause 6.2.2 Table 2 BS EN 61386-1 +60°C

Diameter mm	Wall thickness			
	Duty: 750N	di	Duty: 1250N	di
16	N/A	N/A	1.5	13
20	1.2	17.6	1.5	17
25	1.2	22.6	1.8	21.4
32	1.5	29	2	28

Manufactured by STR Marketing Ltd

Certified MS ISO 9001:2015 / Carbon Footprint independently verified by ETC-Africa. A member of the Carbon Protocol of South Africa.