





uPVC Conduit pipes with integral solvent weld socket

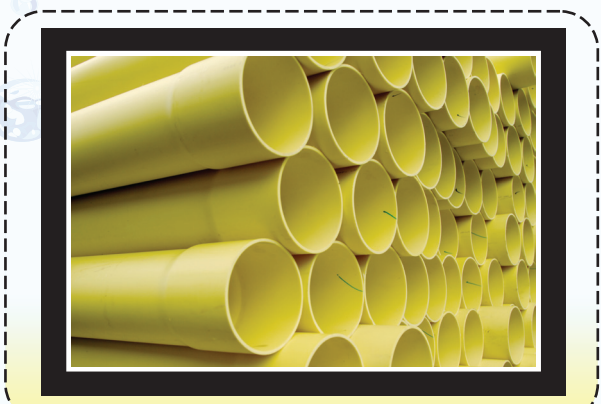

Material: uPVC
Colour: Yellow
Dimension: mm
Trademark: PPP

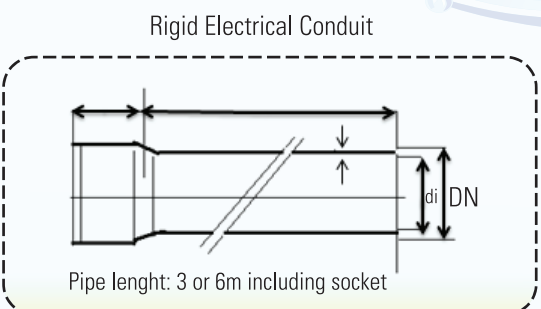

Field of application:
 Rigid conduit piping for cable management (buried underground)

GENERAL TECHNICAL CHARACTERISTICS

Geometrical Characteristics

- Dimensions
- Nominal outside diameters
- Wall Thickness (plain conduit)

Standard Requirements

Clause 8 Table 101
 Clause 8 Table 101 (size only)
 Annex B B.1 BS EN 61386-1

Mechanical Characteristics

- Resistance to Compression
- Resistance to Impact

Clause 10.2 - **Type:** 250N, 450N, 750N
 Clause 10.3 - **Type:** Light (code L), Normal (code N)

Diameter mm	Wall thickness			
	Duty: 450N	di	Duty: 750N	di
40	1.8	36.4	N/A	N/A
50	2.0	46	2.4	45.2
63	2.0	59	3.0	57
75	2.8	69.4	3.2	68.6
*80	2.5	75	3.0	74
110	3.2	103.6	4.2	101.6
160	4.7	150.6	5.2	149.6

* Special Customer requirement

Manufactured by STR Marketing Ltd
 Certified MS ISO 9001:2015 / Carbon Footprint independently verified by ETC-Africa. A member of the Carbon Protocol of South Africa.